

Akuvox A092

Quick Guide

Unpacking

Before you begin using the device, please check the version you got and ensure that the following items are included in the shipped box:



A092 x1



Wall-mounting template x1



Plastic wall anchor x3



ST4x20 crosshead screw x3



Silicone pad (for wire) x2



Silicon pad (for power supply) X1




M3x5 crosshead screw x3



Wire fastener x3



Cable gland x1



Wire x9



Cable tie x5





2x6-PIN terminal block x 1



2x9-PIN terminal block x 2


Akuvox A092

Product Overview

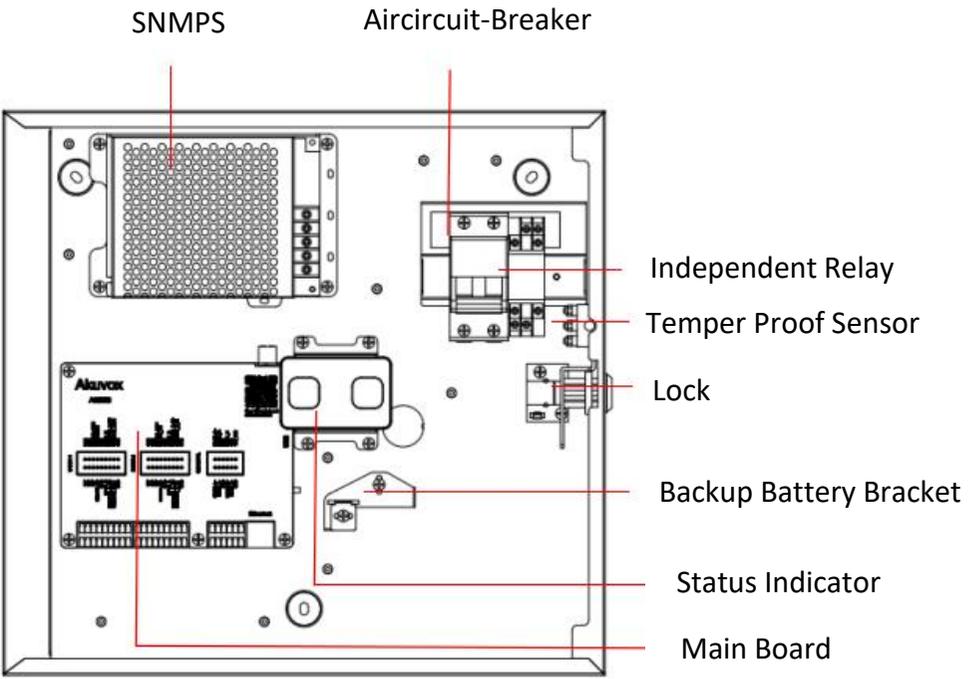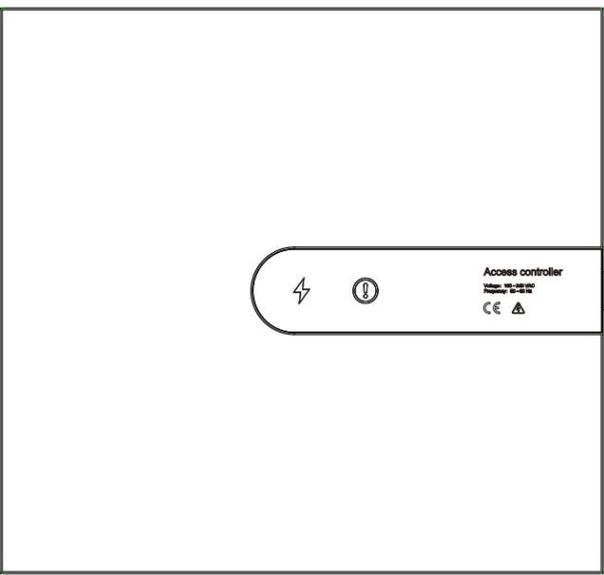


Akuvox A092


Installation




Stick the wall-mounting template on the wall where the device needs to be installed. According to the screw hole position on the template, use an electric drill to drill the hole with a diameter of 6mm and a depth of 25mm.




Insert plastic wall anchors into the holes.




Fix A092 with three ST4x20 crosshead screws on the wall.



Please place cable gland or silicone pad as the figure shown according to your need.




Place silicone pad for lead hole.




Knock a lead hole with the appropriate tool according to the desired wiring position.




Akuvox A092

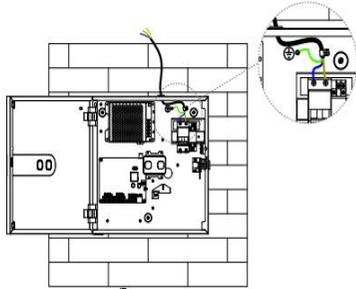

Connect the provided wire as shown in the figure, then use M3X5 crosshead screw and wire fastener to fix the wire on the A092.

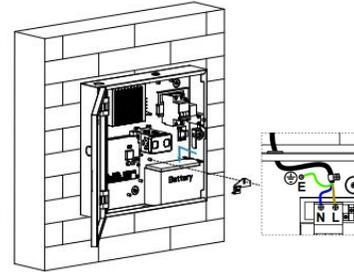

Place the battery as shown in the figure, and use the fixing plate and M3X5 crosshead screw to fix it.



The installation is done, and please lock the cover. Then remove the



Akuvox A092

Configuration

1. While A092 starts up normally, click **Search key** in the IP Scanner tool to search the IP address. (Please consult Akuvox Technical Team for IP Scanner tool).
2. Access the Web UI: Type the IP address into browser to configure the device.

Operation

A092 controller can realize the independent control of two doors; Each door can be connected with an electric lock, 2 card readers (inside and outside) 2 key input.

Unlock Door

1. After swiping the card on the card reader, A092 will unlock the electronic lock;
2. Press the door button, A092 will unlock the electric lock.

Fire Alarm

When the fire alarm is triggered, A092 will unlock the electronic lock of all doors.

Akuvox A092



NOTICE:

Quick guide can be viewed on Global Visions website.



GLOBAL VISIONS INC.
877-725-8869
www.globalvisionsinc.com