


Gateway iOA(POE)[®]

Datasheet

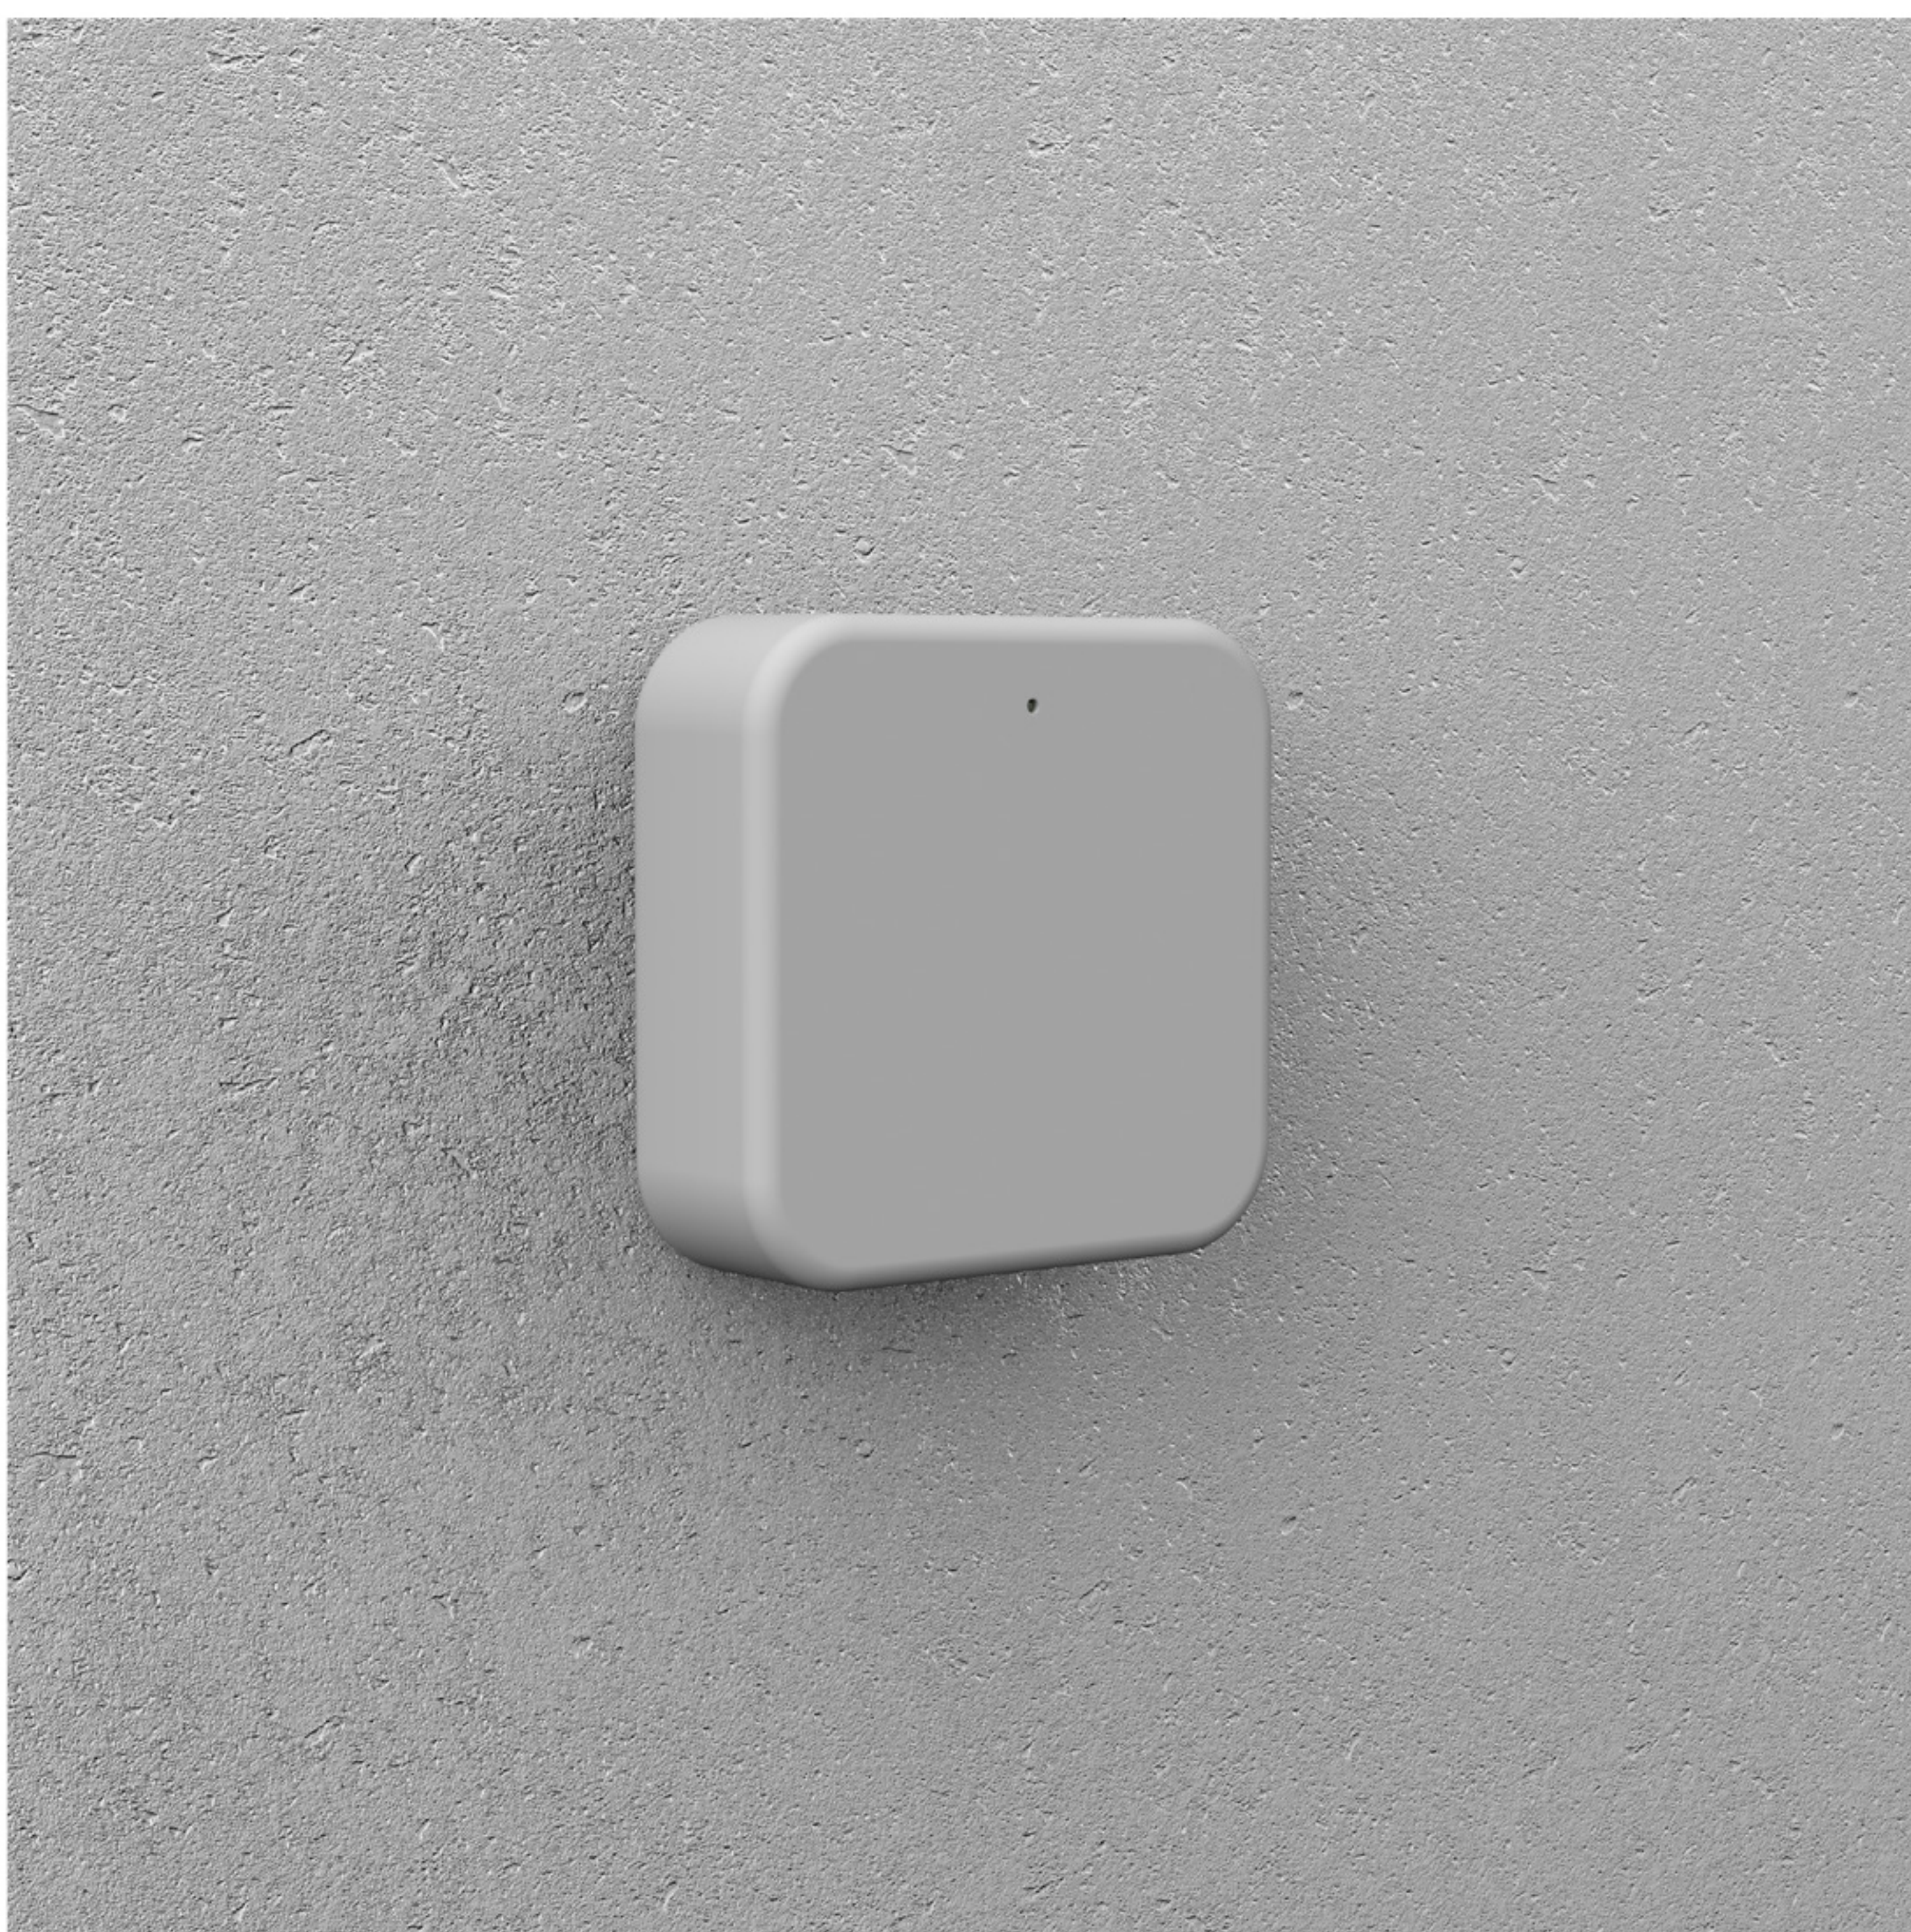

The following rights are reserved:

- Any unannounced changes to the functionality or appearance of this product will void the warranty.
- Use of this product in any environment or in any manner not specified herein will also void the warranty.

Gateway iOA (POE)®


NE

iTEC OnAccess Gateway iOA plays a crucial role in facilitating remote access to the terminals. Although it is possible the iTEC OnAccess software without the Gateway, functionalities are limited to the proximity of Bluetooth. The presence of the Gateway iOA allows full exploitation of all functionalitites from any location in the world.



technical sheet

Material	ABS
Technology	Wi-Fi 2.4G ; Rj45
Power	DC 5V
Leds	Blue and red
Driving Consumption	350mA
Static Consumption	15µA
Software	iTEC iOA iTEC iOA Pro iTEC iOA Hospitality
Reading Distance	> 10m
Weight	0,2 Kg
Resistance of Humidity	< 95%
Work Temperature	-20°C ~ +65°C
Storage Temperature	-40°C ~ +80°C
Power Input	DC 5V / 500mA
IEEE standard	802.11 b / g / n
Power Interface	Type-C USB

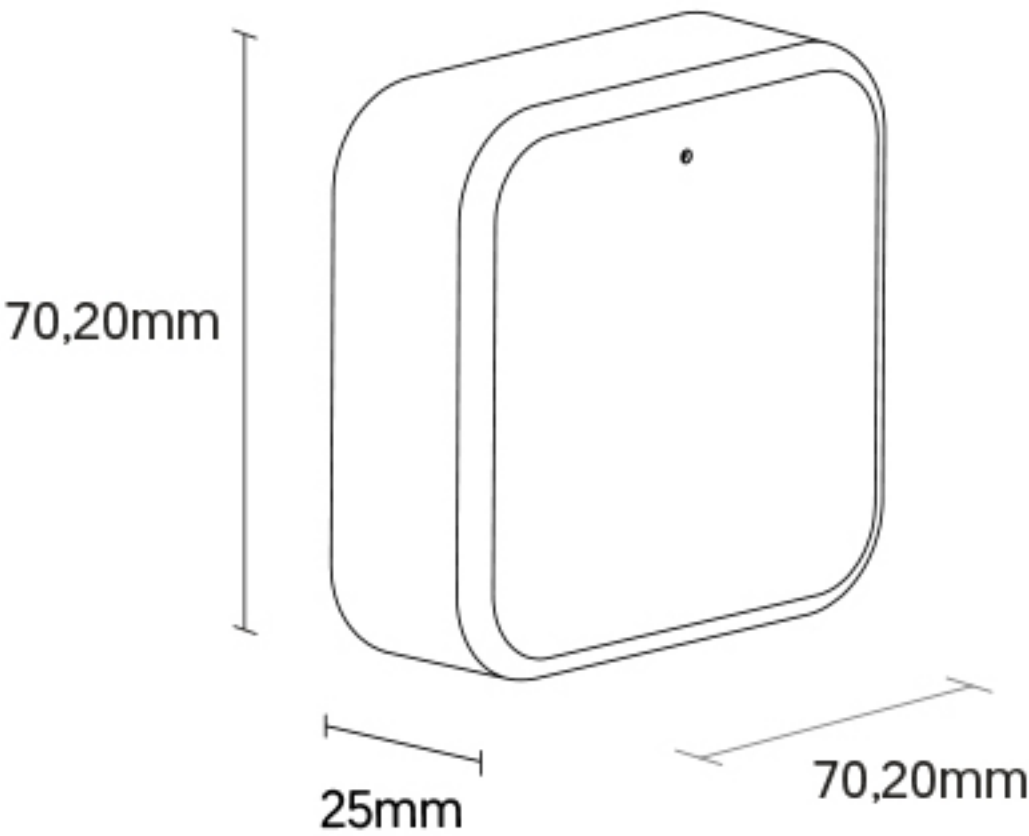



Web: GlobalVisionsInc.com
Email: sales@GlobalVisionsInc.com
Phone: 877-725-8869