iCode 03® cUL/UL

Datasheet





The following rights are reserved:

- Any unannounced changes to the functionality or appearance of this product will void the warranty.
- Use of this product in any environment or in any manner not specified herein will also void the warranty.

one step forward

iCode 03® cUL



Optimized for American and Canadian markets. An iCode series option.

Datasheet

technical sheet

Material Stainless Steel

Opening Method Code, Card, WiFi, Bluetooth,

APP, Mechanical Key

Identification Time <1.0S

Communication Bluetooth 4.1, Mifare

(13,56MHz)

Cylinder ANSI Half Round Cylinder

Compatibility with Locks ANSI Lock
Emergency Power N/A

Emergency Opening Mechanical KeyVoltage DC 6v [AAA*4]Max. Power 6V-MAX

Battery Life ~12 months; supports ~5,000

opening & closing opera-

tions

Leds White

Low Battery Alarm In APP and voice alarm

Consumption <200mA Static Consumption 65µA

Time Open 5s; 10s; 15s; 30s; 60s; custom Number of Openings ~5000 Openings (1Year)

Software iTEC Hybrid, iTEC onAccess

(Web), iTEC onAccess Pro (Web), iTEC onHospitality

(Web)

APP's iTEC onAccess

Compatibility iOS 8/Android5 or above

Stand Alone
IP
IP56
Weight
1,92 Kg
Humidity Resistance
30%-95%
Temp. of Operation
-20°C~+65°C

N° of Cards 200 N° of Codes Unlimited

No of Autodefined Codes 150

The following rights are reserved:

No of Fingerprints

N/A

• Any unannounced changes to the functionality or appearance of this product will void the warranty.

Yes

• Use of this product in any environment or in any manner not specified herein will also void the warranty.

Management Code Yes


Door Thickness 35mm~110mm

mortises

Ansi Solenoid cUL®

ref.: N815



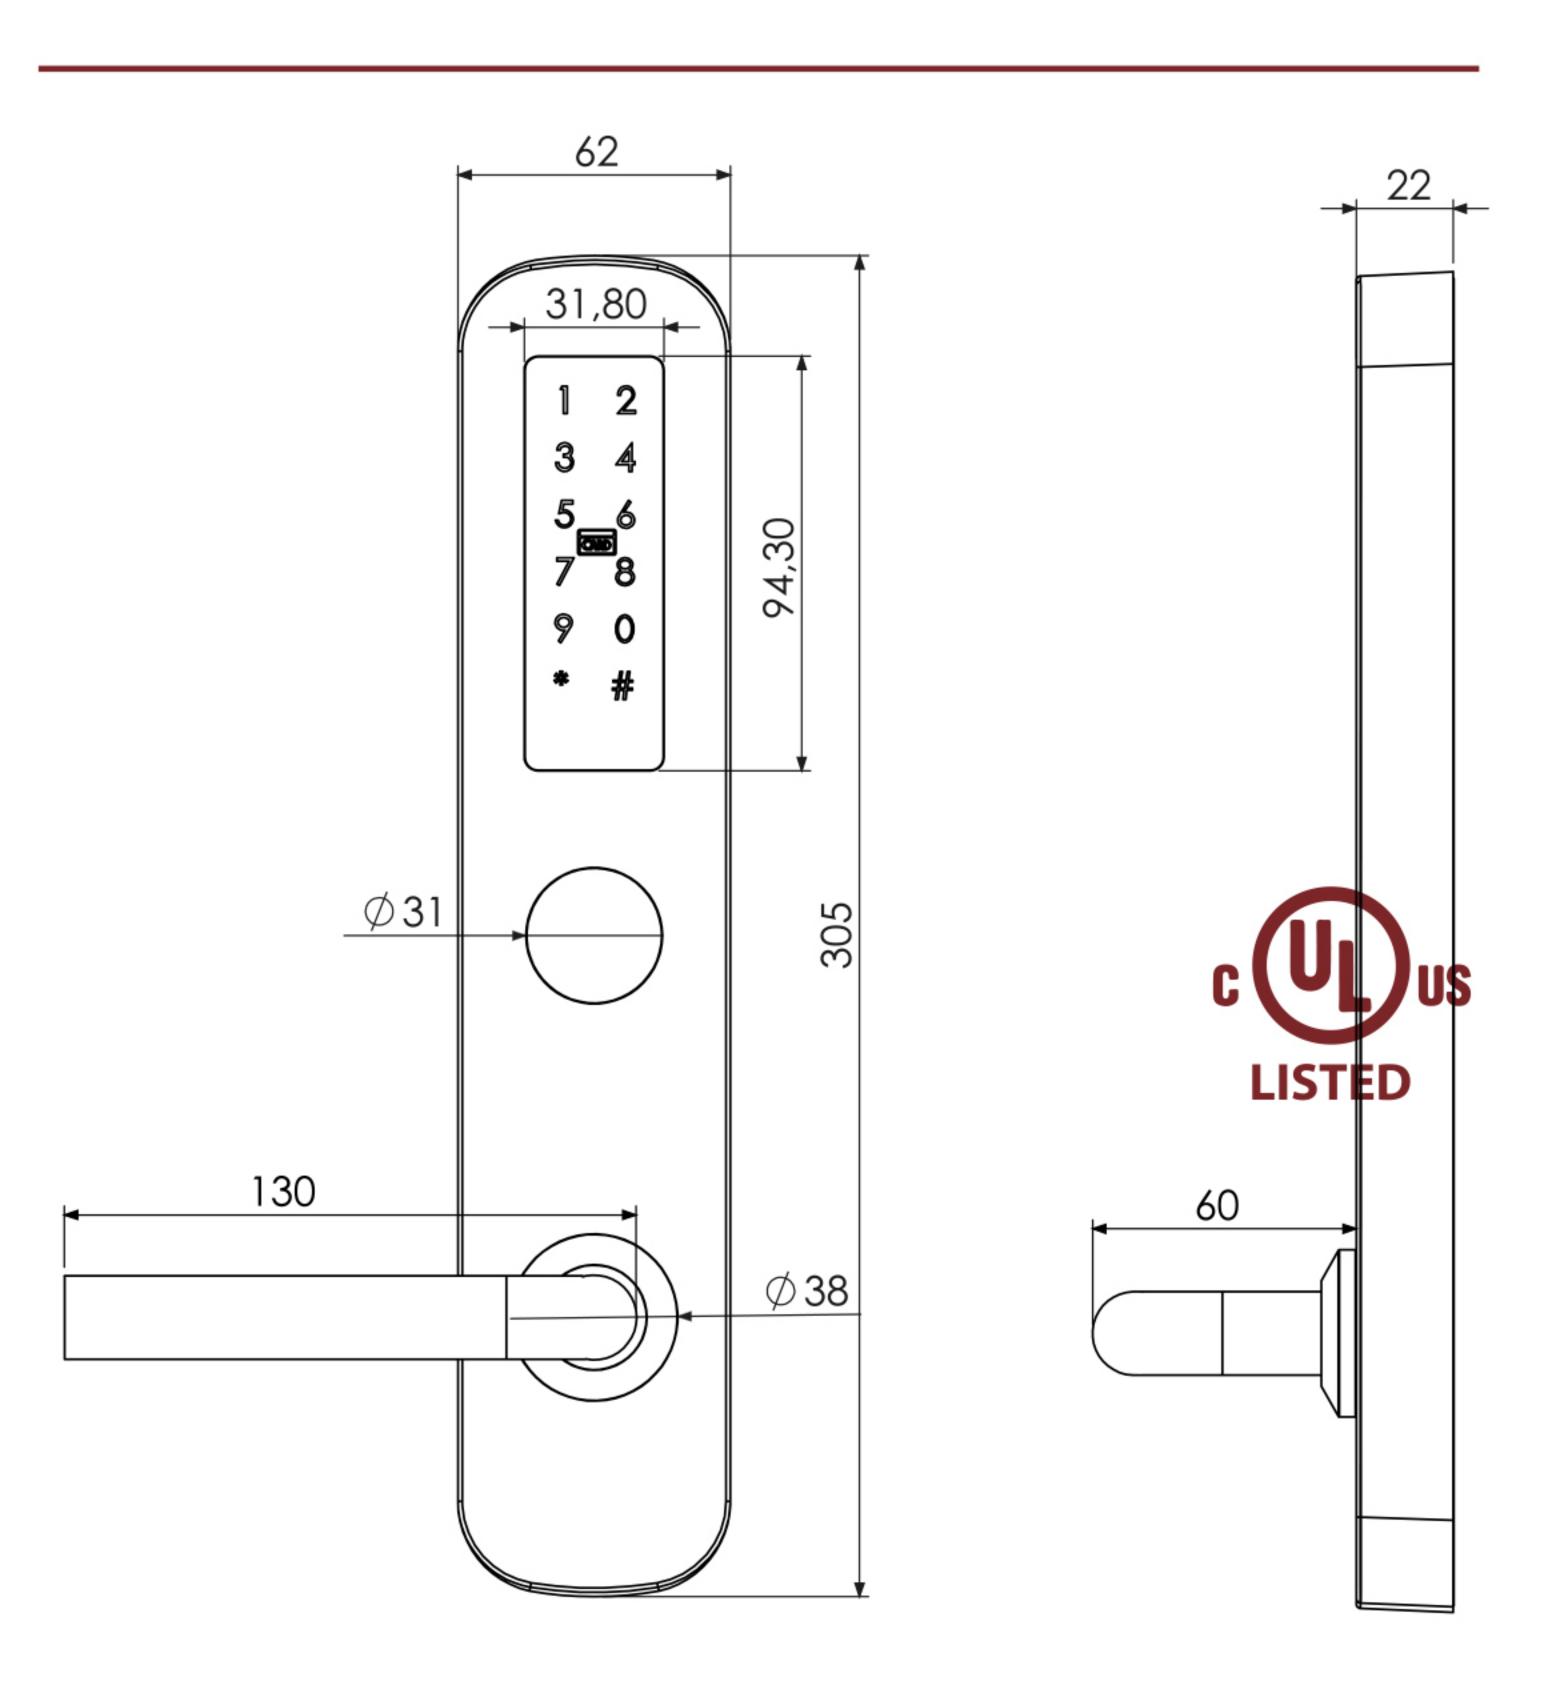







Web: GlobalVisionsInc.com

Email: sales@GlobalVisionsInc.com

Phone: 877-725-8869