

# iCylinder MT®

## Datasheet



The following rights are reserved:

- Any unannounced changes to the functionality or appearance of this product will void the warranty.
- Use of this product in any environment or in any manner not specified herein will also void the warranty.

NE

# iCylinder MT®


iCylinder MT® is a wireless electronic cylinder that lets you easily control access with your smartphone through iTEC onAccess, iCylinder MT® has an integrated motor, that allows your to unlock the door without manually rotating the cylinder..



## technical sheet

Material	Metal Alloy and ABS
Opening Method	Card, WiFi, Bluetooth, APP, Code [iKeypad 03]
Identification Time	<2.0S
Communication	Bluetooth 4.1
Cylinder	European cylinder
Compatibility with Locks	Standard european
Emergency Power	N/A
Emergency Opening	Mechanical key
Voltage	DC 9v [CR123A*3]
Max. Power	9V-MAX
Battery Life	~ 6 months, supports ~ 2,000 opening & closing operations
Leds	N/A
Low Battery Alarm	In APP and voice alarm
Consumption	<800mA
Static Consumption	50µA
Time Open	5s; 10s; 15s; 30s; 60s; custom
Number of Openings	~2,000 Openings [6months]
Software	iTEC Hybrid, iTEC onAccess [Web], iTEC onAccessPro [Web], iTEC onHospitality [Web]
APP's	iTEC onAccess
Compatibility	iOS 8/Android 5 or above
Stand Alone	Yes
IP	N/A
Weight	0,60 Kg
Humidity Resistance	30%-95%
Temp. of Operation	-20°C~+ 55°C
Nº of Cards	N/A
Nº of Codes	N/A
Nº of Autodefined Codes	N/A
Nº of Fingerprints	N/A
User Levels	Yes
Managment Code	N/A
Door Thickness	35mm ~70mm

## dimensions

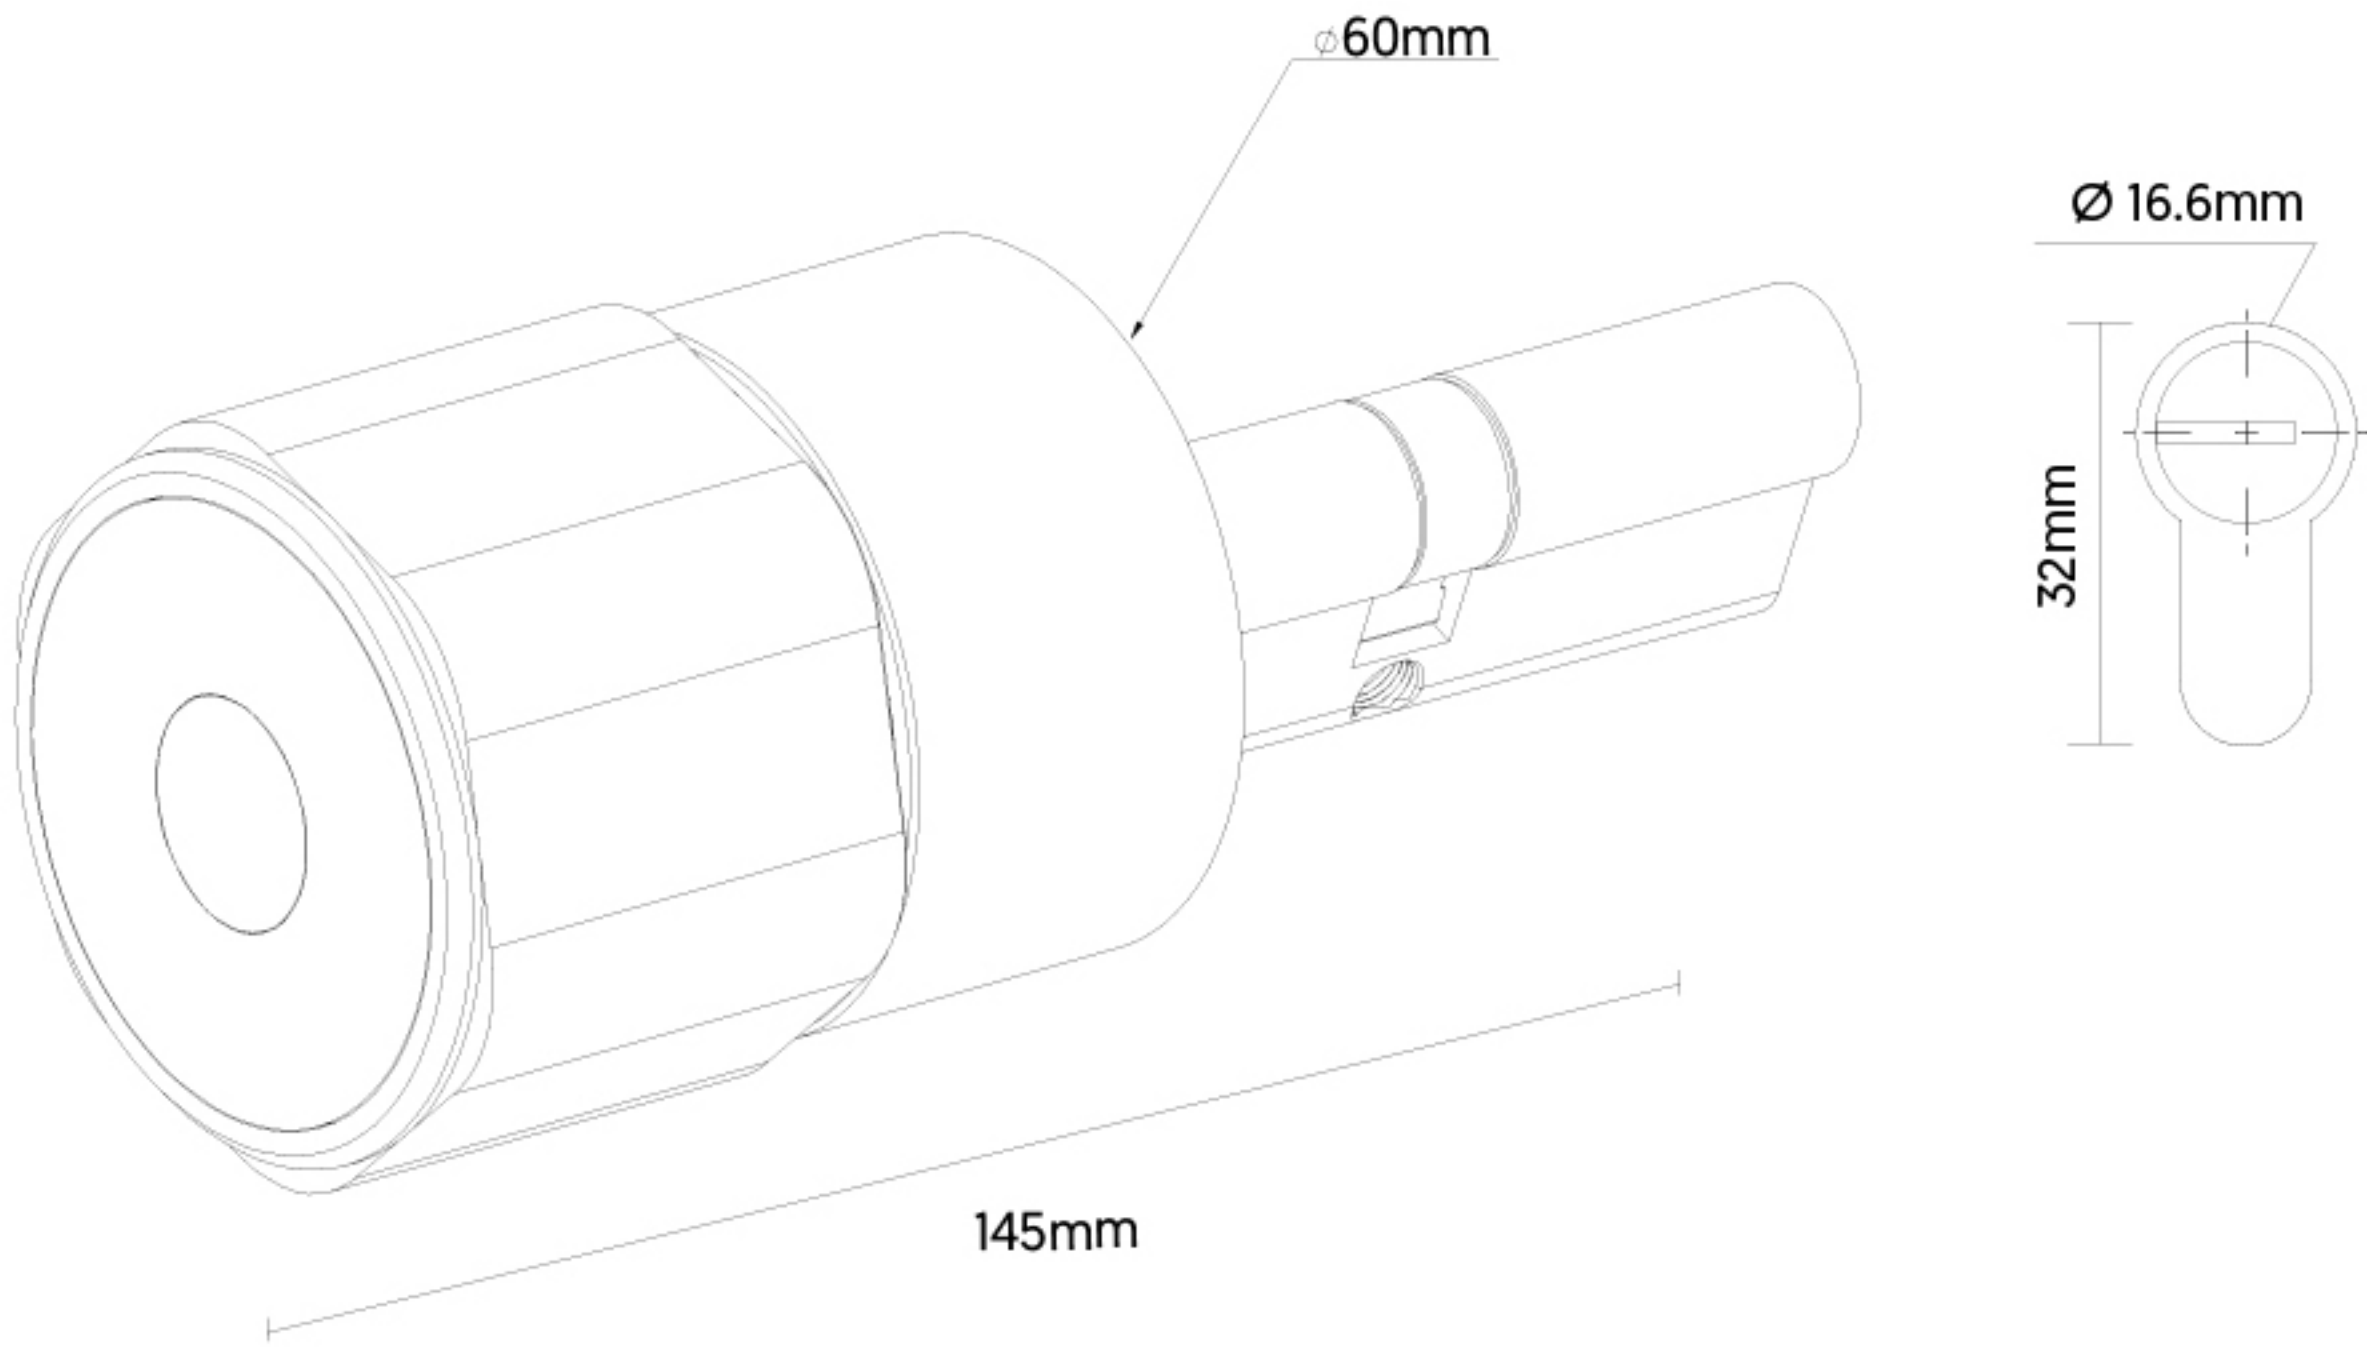



**Web:** [GlobalVisionsInc.com](http://GlobalVisionsInc.com)  
**Email:** [sales@GlobalVisionsInc.com](mailto:sales@GlobalVisionsInc.com)  
**Phone:** 877-725-8869