

iMCode 03®

Datasheet



The following rights are reserved:

- Any unannounced changes to the functionality or appearance of this product will void the warranty.
- Use of this product in any environment or in any manner not specified herein will also void the warranty.

iMCode 03®

NE


The iMCode 03 is a simple door lock that can be installed and managed by mobile phone application and web browser. It can be controlled via Bluetooth via the iTEC on Access and iTEC on Access Pro application (iOS and Android) without the need for internet or WIFI. Being able to be managed by web browser and WIFI connection.



technical sheet

Material	Metal Alloy
Opening Method	Code, Card, WiFi, Bluetooth, APP, Mechanical Key
Identification Time	<1.0S
Communication	Bluetooth 4.1, Mifare [13,56MHZ]
Cylinder	N/A
Compatibility with Locks	N/A
Emergency Power	Micro USB
Emergency Opening	Mechanical key
Voltage	DC 6v [AAA*4]
Max. Power	6V-MAX
Battery Life	~ 12 months, supports ~ 5,000 opening & closing operations
Leds	White
Low Battery Alarm	In APP and voice alarm
Consumption	<200mA
Static Consumption	65µA
Time Open	5s; 10s;15s; 30s; 60s; custom
Number of Openings	~5,000 Openings [1year]
Software	iTEC Hybrid, iTEC onAccess [Web], iTEC onAccess Pro [Web], iTEC onHospitality [Web]
APP's	iTEC onAccess
Compatibility	iOS 8/Android 5 or above
Stand Alone	Yes
IP	IP56
Weight	1,78 Kg
Humidity Resistance	30%-95%
Temp. of Operation	-20°C~+ 55°C
Nº of Cards	200
Nº of Codes	Unlimited
Nº of Autodefined Codes	150
Nº of Fingerprints	N/A
User Levels	Yes
Managment Code	Yes
Door Thickness	30mm~75mm

dimensions

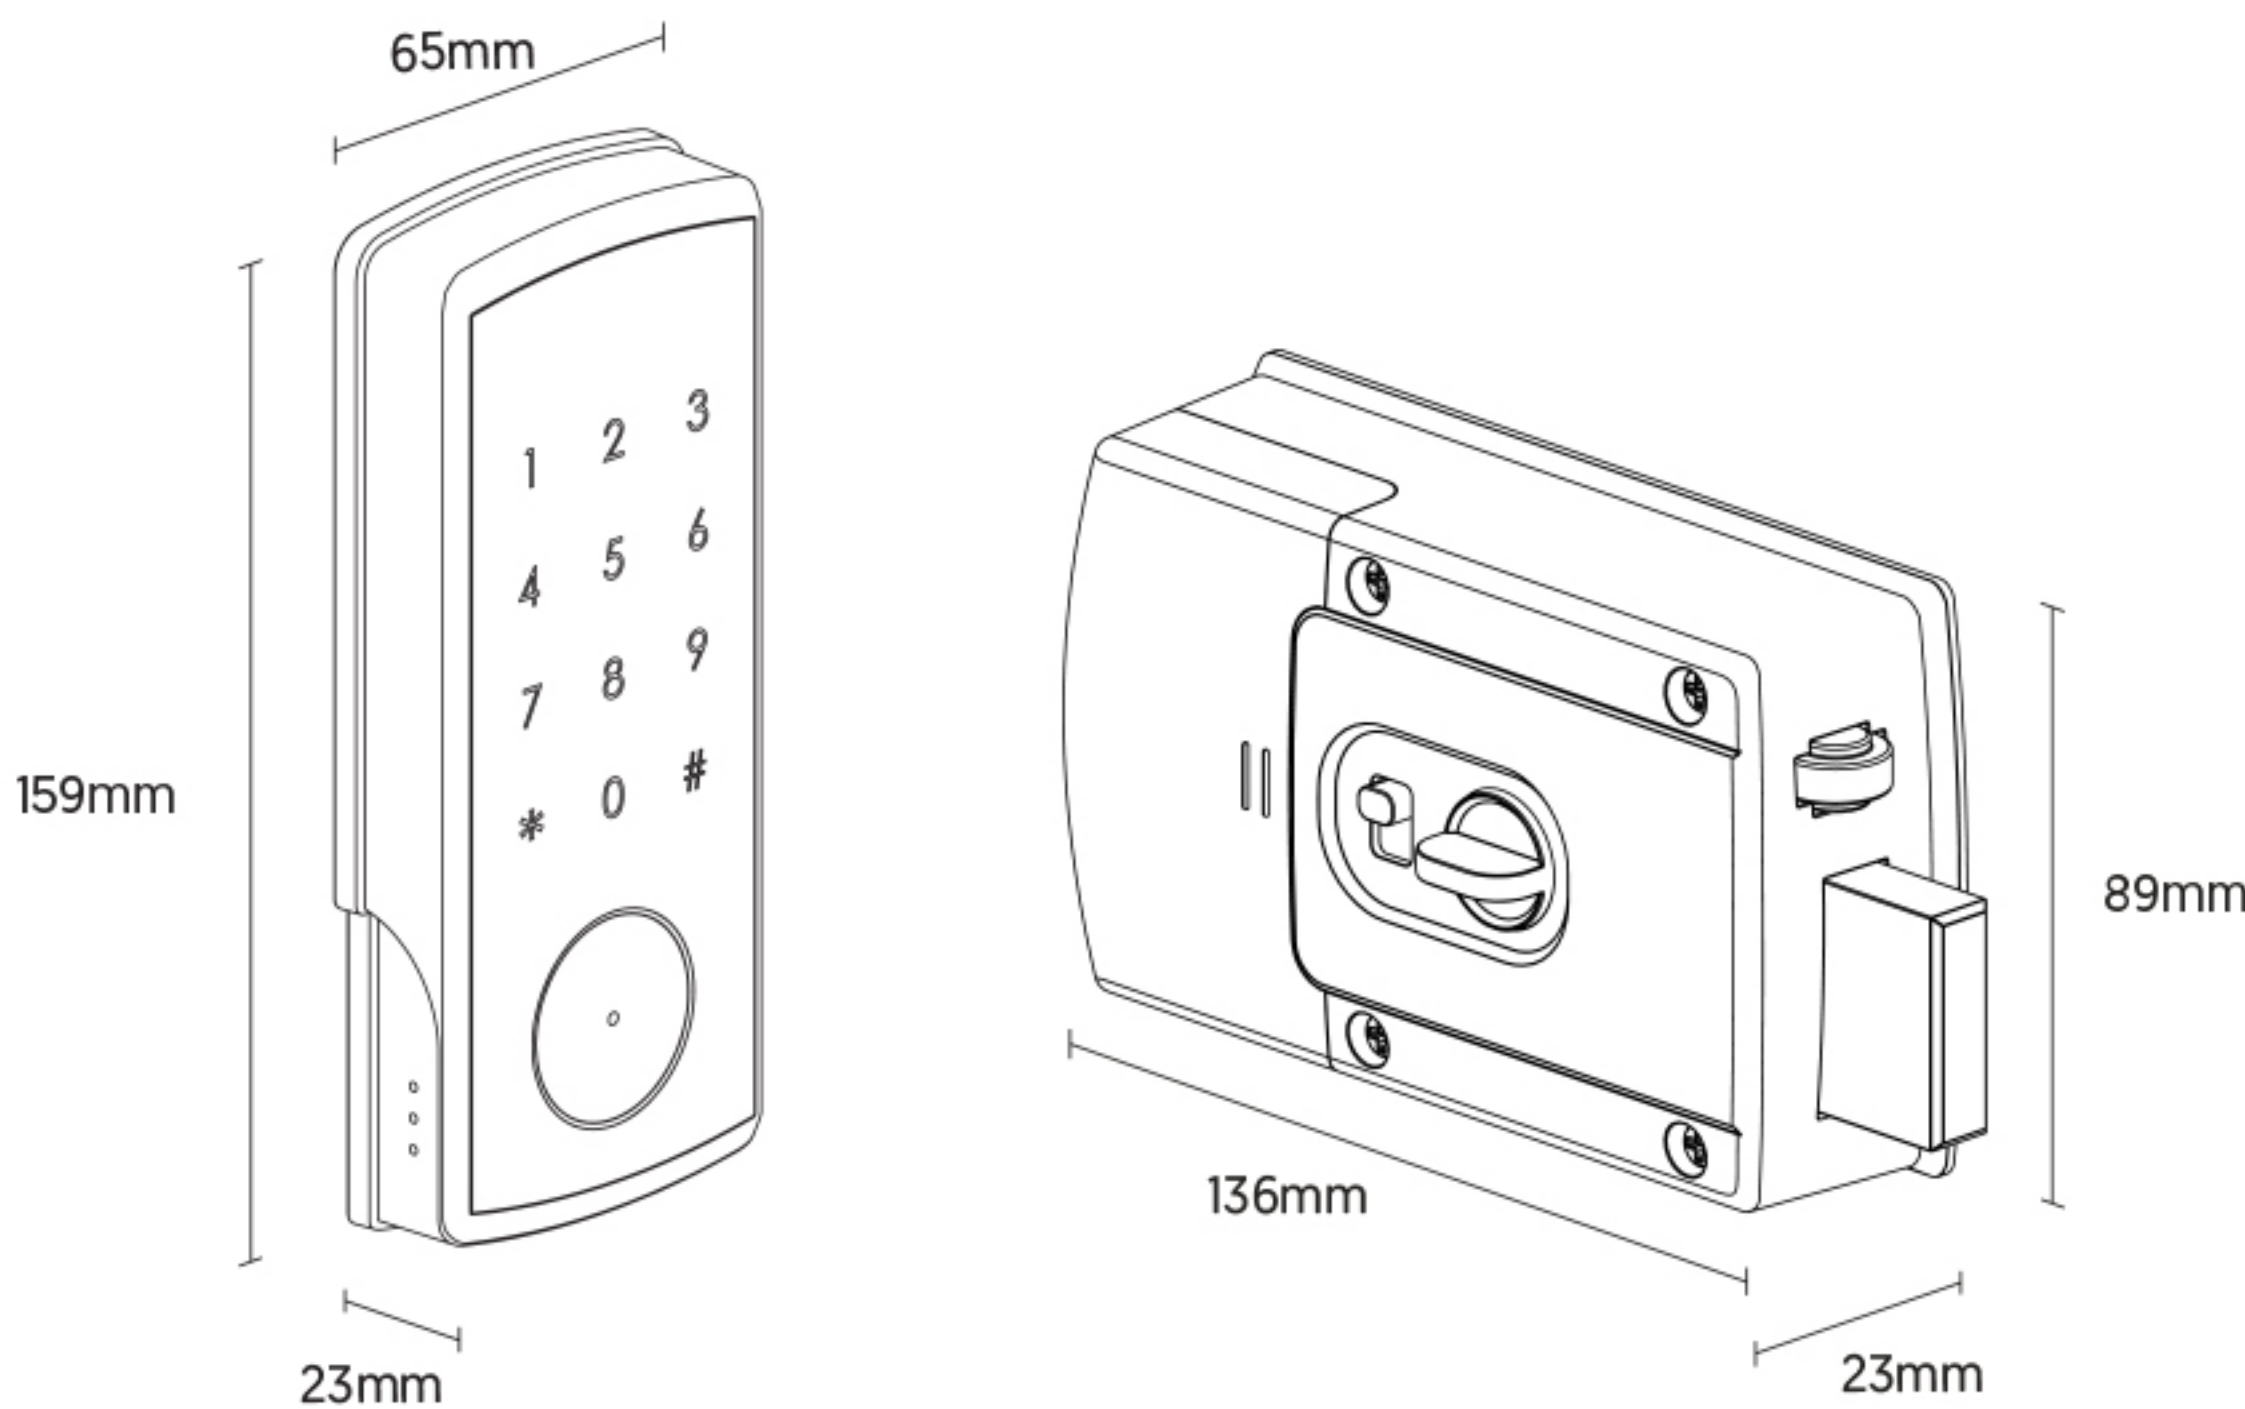



Web: GlobalVisionsInc.com
Email: sales@GlobalVisionsInc.com
Phone: 877-725-8869