

iMCode 03 VT[®]

Datasheet



The following rights are reserved:

- Any unannounced changes to the functionality or appearance of this product will void the warranty.
- Use of this product in any environment or in any manner not specified herein will also void the warranty.

iMCode 03 VT®

ZE

Similar to the iMCode 03® model, the iMCode-VT® stands out for its interior function being upright with a sleeker design and for added security with a dead bolt lock built into the door.




technical sheet

Material	Metal Alloy
Opening Method	Code, Card, WiFi, Bluetooth, APP, Mechanical Key
Identification Time	<1.0S
Communication	Bluetooth 4.1, Mifare [13,56MHZ]
Cylinder	N/A
Compatibility with Locks	N/A
Emergency Power	Micro USB
Emergency Opening	Mechanical key
Voltage	DC 6v [AAA*4]
Max. Power	6V-MAX
Battery Life	~ 12 months, supports ~ 5,000 opening & closing operations
Leds	White
Low Battery Alarm	In APP and voice alarm
Consumption	<200mA
Static Consumption	65µA
Time Open	5s; 10s;15s; 30s; 60s; custom
Number of Openings	~5,000 Openings [1year]
Software	iTEC Hybrid, iTEC onAccess [Web], iTEC onAccess Pro [Web], iTEC onHospitality [Web]
APP's	iTEC onAccess
Compatibility	iOS 8/Android 5 or above
Stand Alone	Yes
IP	IP56
Weight	1,78 Kg
Humidity Resistance	30%-95%
Temp. of Operation	-20°C~+ 55°C
N° of Cards	200
N° of Codes	Unlimited
N° of Autodefined Codes	150
N° of Fingerprints	N/A
User Levels	Yes
Management Code	Yes
Door Thickness	30mm~75mm

mortises

iTSL 01®

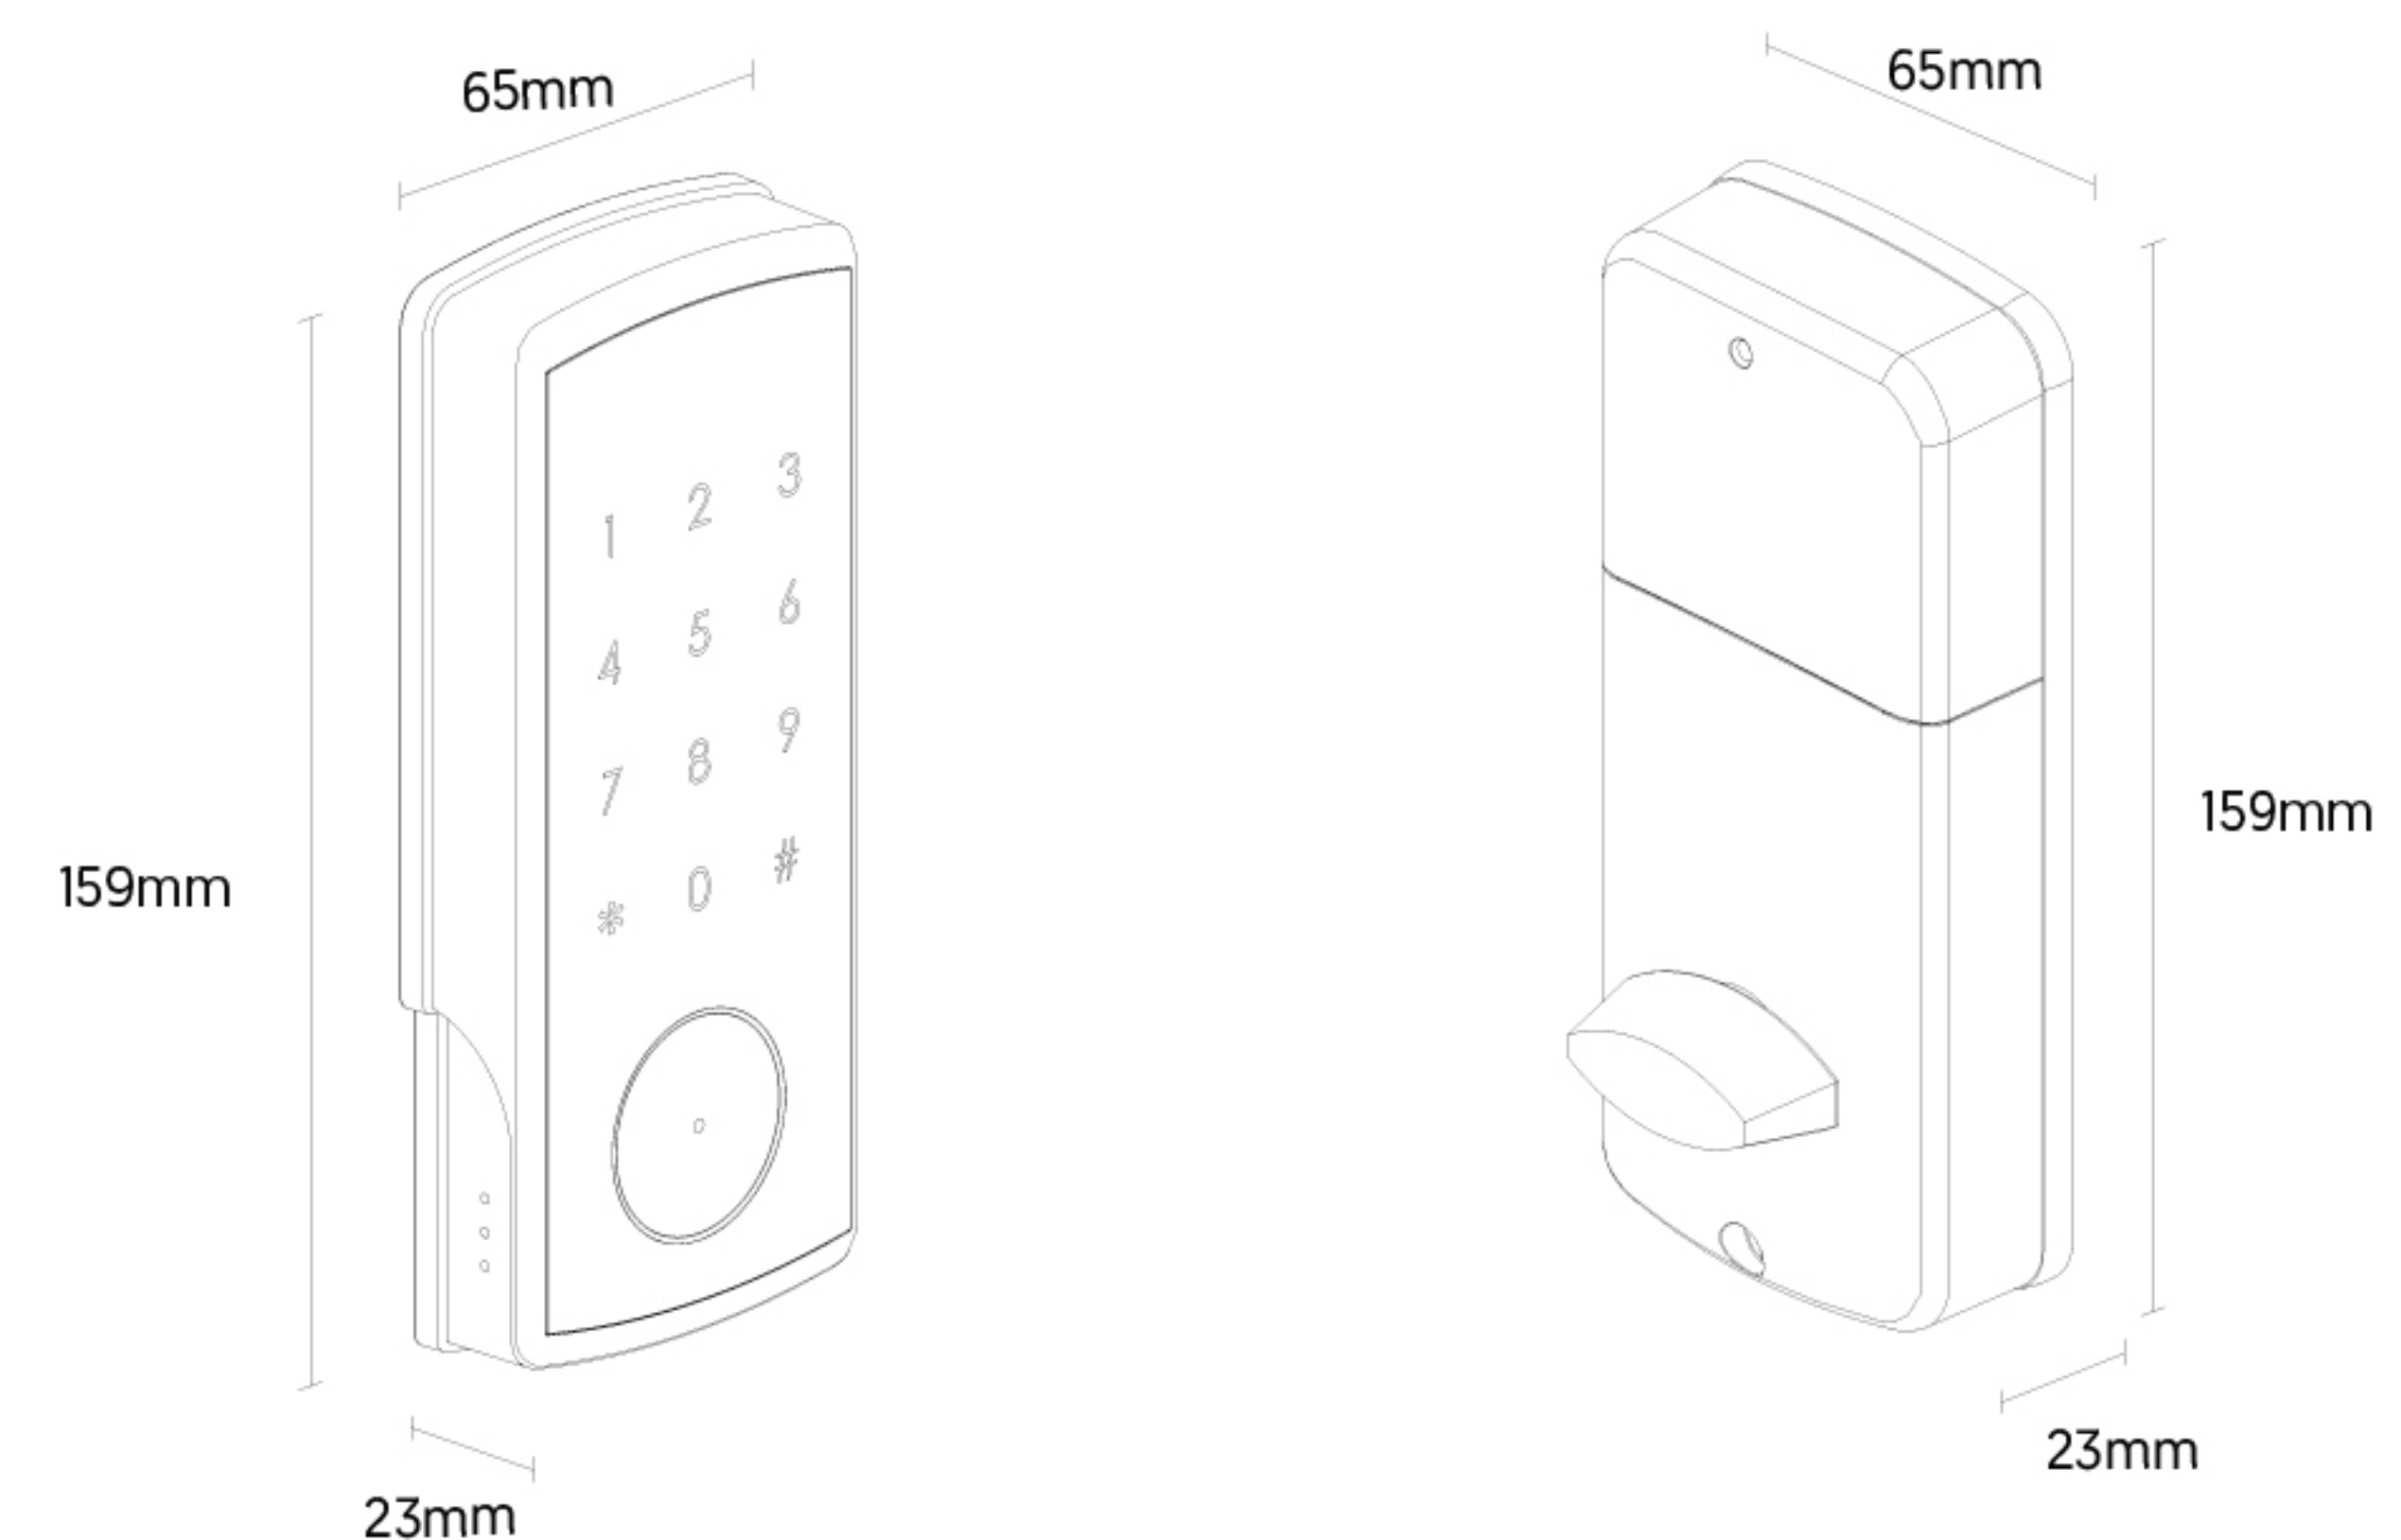



Web: GlobalVisionsInc.com
Email: sales@GlobalVisionsInc.com
Phone: 877-725-8869